


10/538262

1/10

FIG. 1

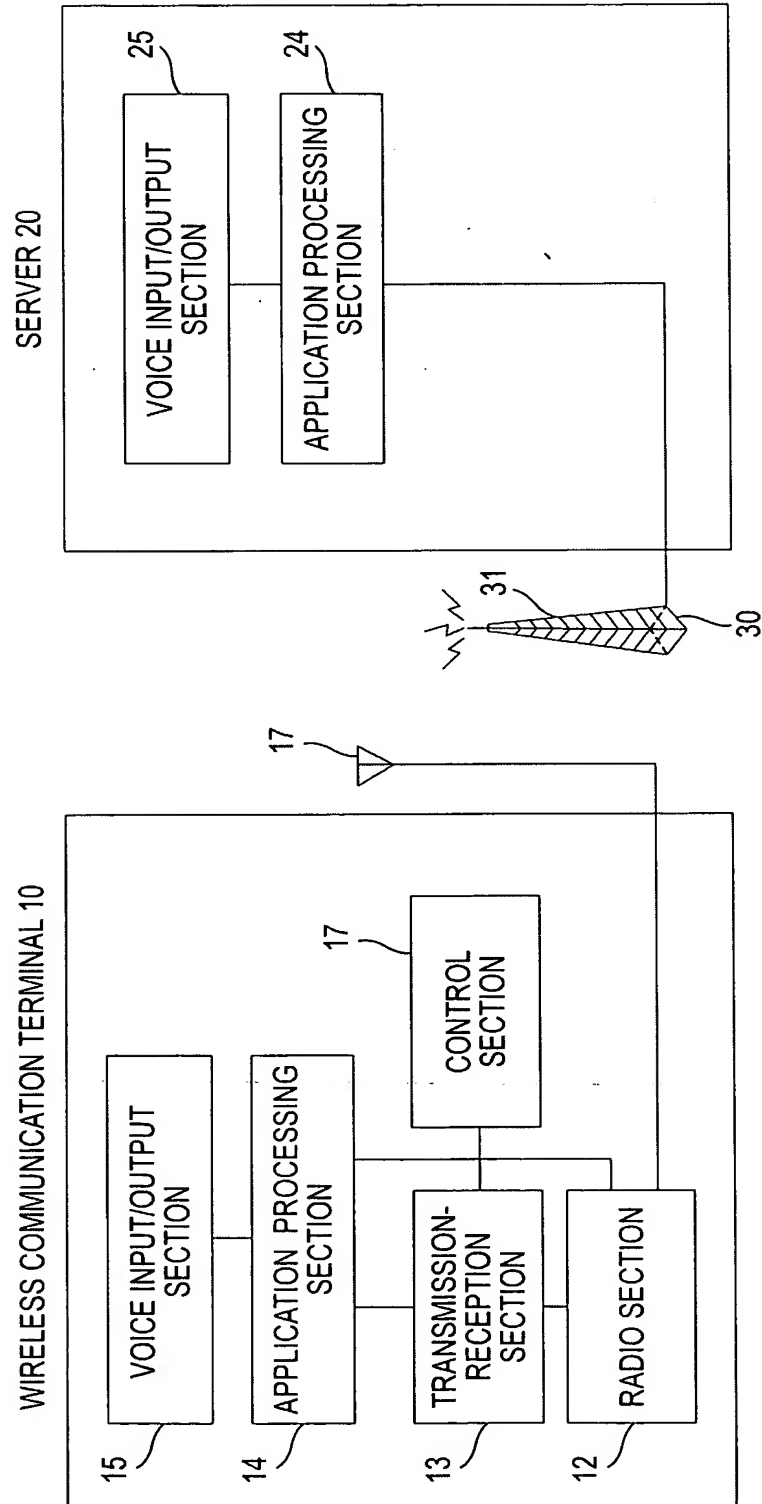

10/538 262

2/10

FIG. 2

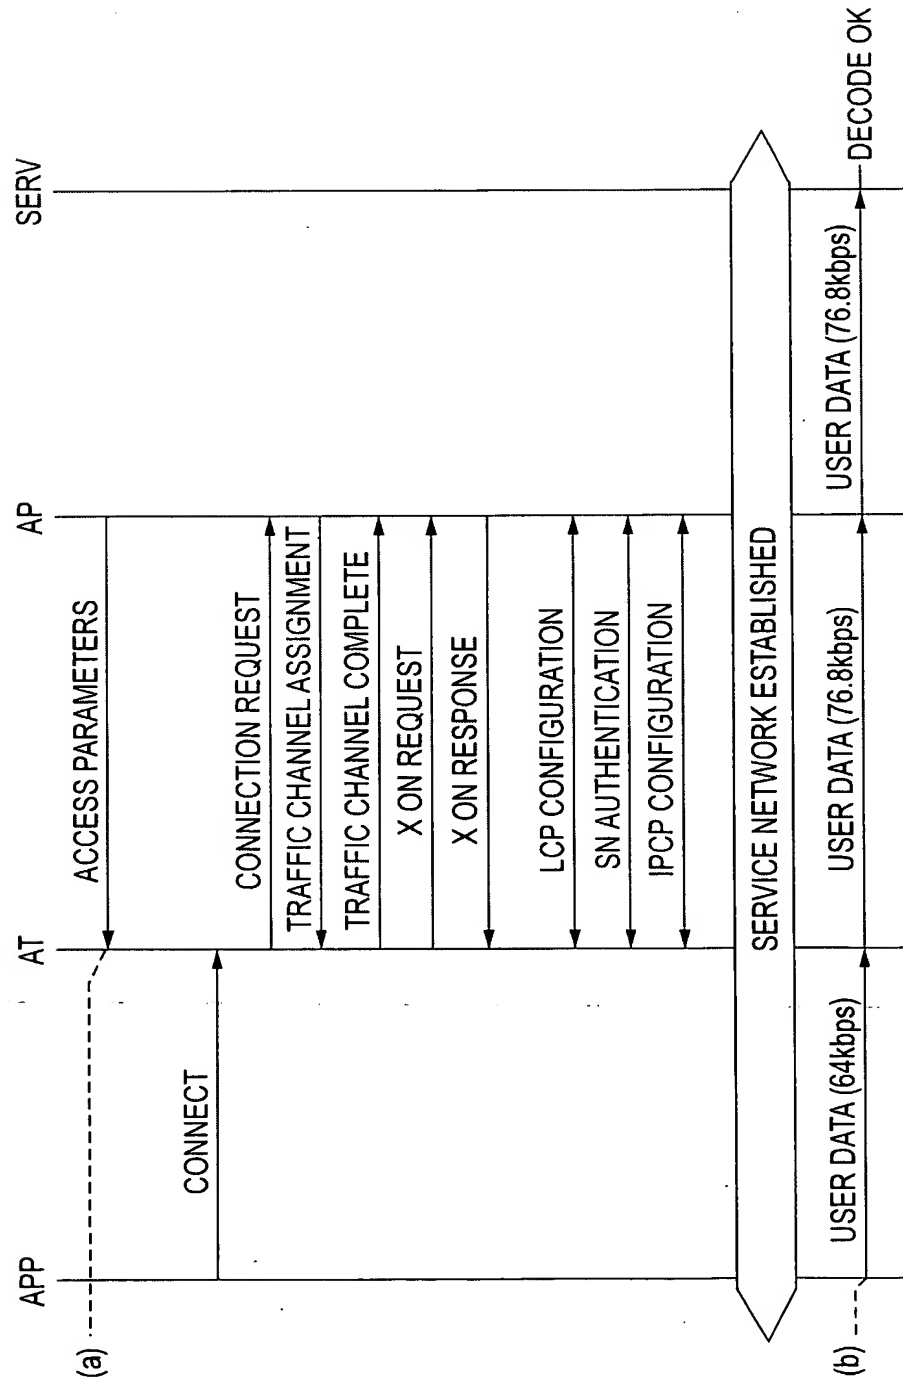


FIG. 3

FIELD	LENGTH (BITS)
MESSAGE ID	8
TRANSACTION ID	8
ATTRIBUTE RECORD	ATTRIBUTE DEPENDENT

4/10

## FIG. 4

### ATTRIBUTE RECORD

FIELD	LENGTH (BITS)	DEFAULT
LENGTH	8	N/A
ATTRIBUTE ID	8	N/A
REVERSE TRAFFIC CHANNEL START	8	1

10/538262

5/10

## FIG. 5


### REVERSE TRAFFIC CHANNEL START

VALUE	MEANING
0 x 01	9.6 kbps
0 x 02	19.2 kbps
0 x 03	38.4 kbps
0 x 04	76.8 kbps
0 x 05	153.6 kbps

10/538262

6/10

FIG. 6

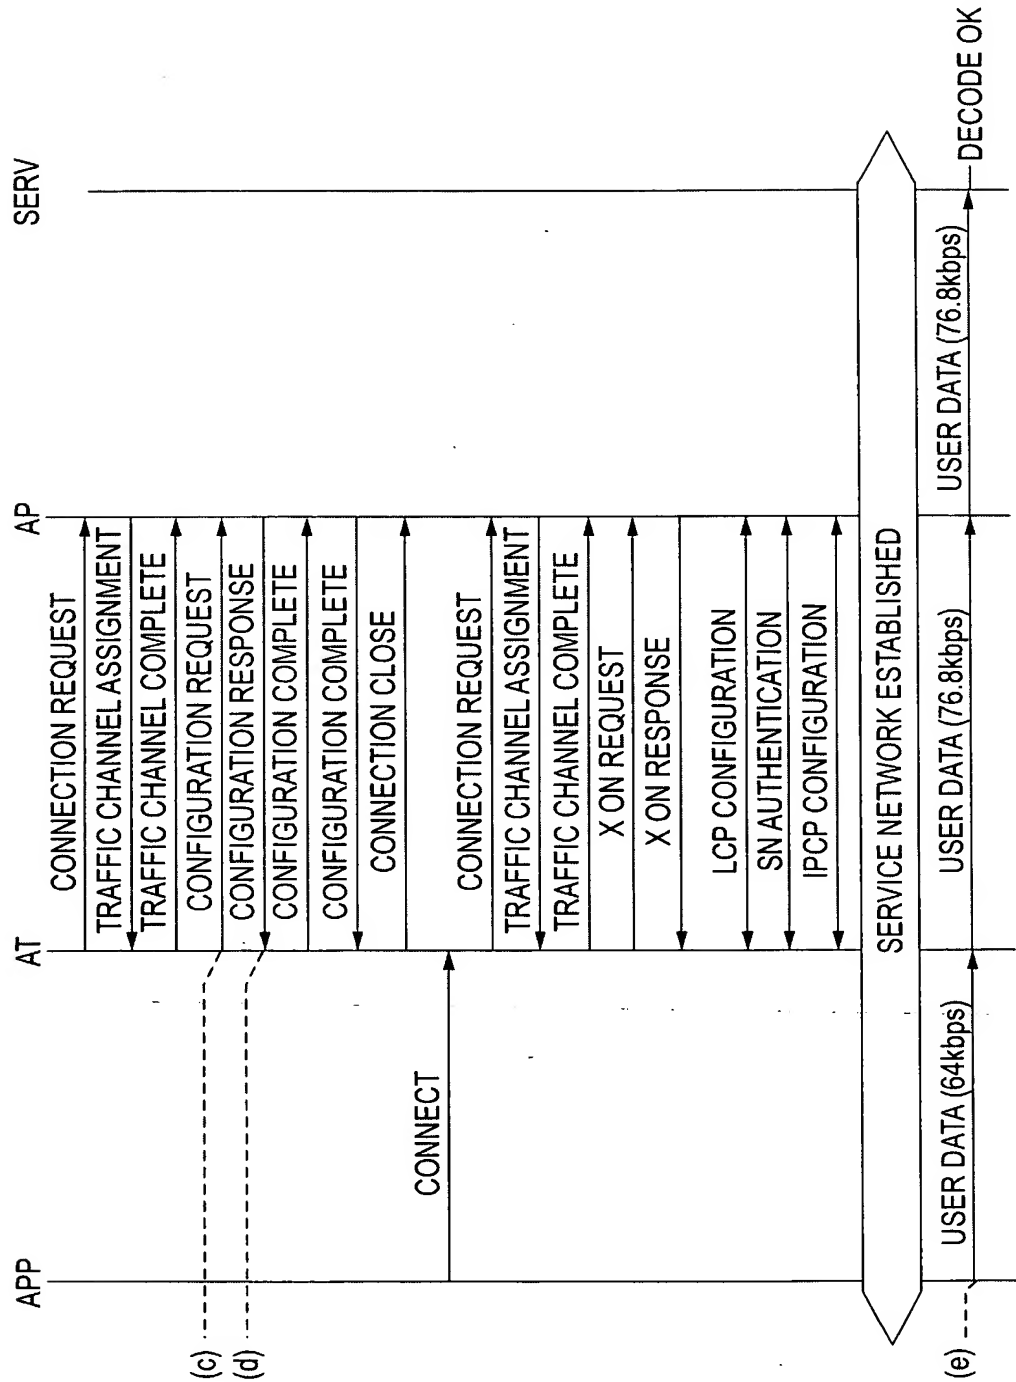

10/538262

7/10

FIG. 7

FIELD	LENGTH (BITS)
MESSAGE ID	8
ACCESS CYCLE DURATION	8
ACCESS SIGNATURE	16
OPEN LOOP ADJUST	8
PROBE INITIAL ADJUST	5
PROBE NUM STEP	4
POWER STEP	4
PROBE LENGTH	3
CAPSULE LENGTH MAX	4

N<sub>ACMPA PERSIST</sub> OCCURENCES OF THE FOLLOWING FIELD:


AP PERSISTENCE	6
----------------	---

<u>RTC START RATE CHANGE ENABLED</u>	<u>1</u>
<u>REVERSE TRAFFIC CHANNEL START</u>	<u>7</u>
RESERVED	VARIABLE

10/538262

8/10

FIG. 8

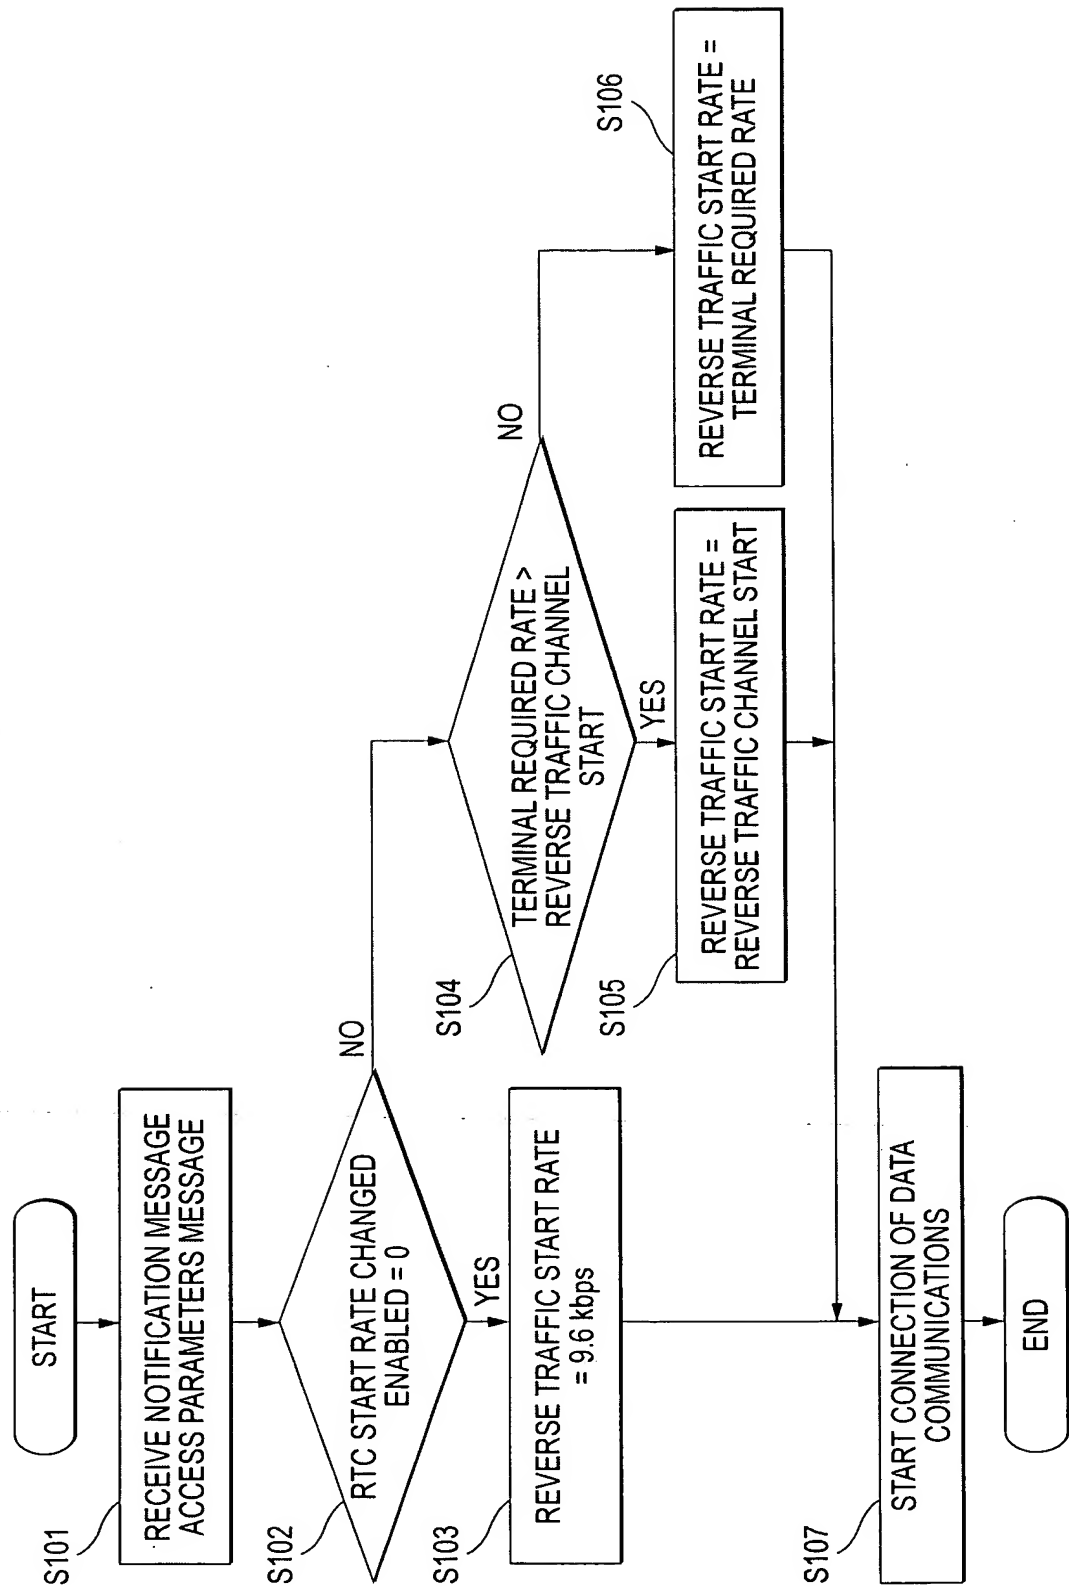




10/538262

9/10

FIG. 9

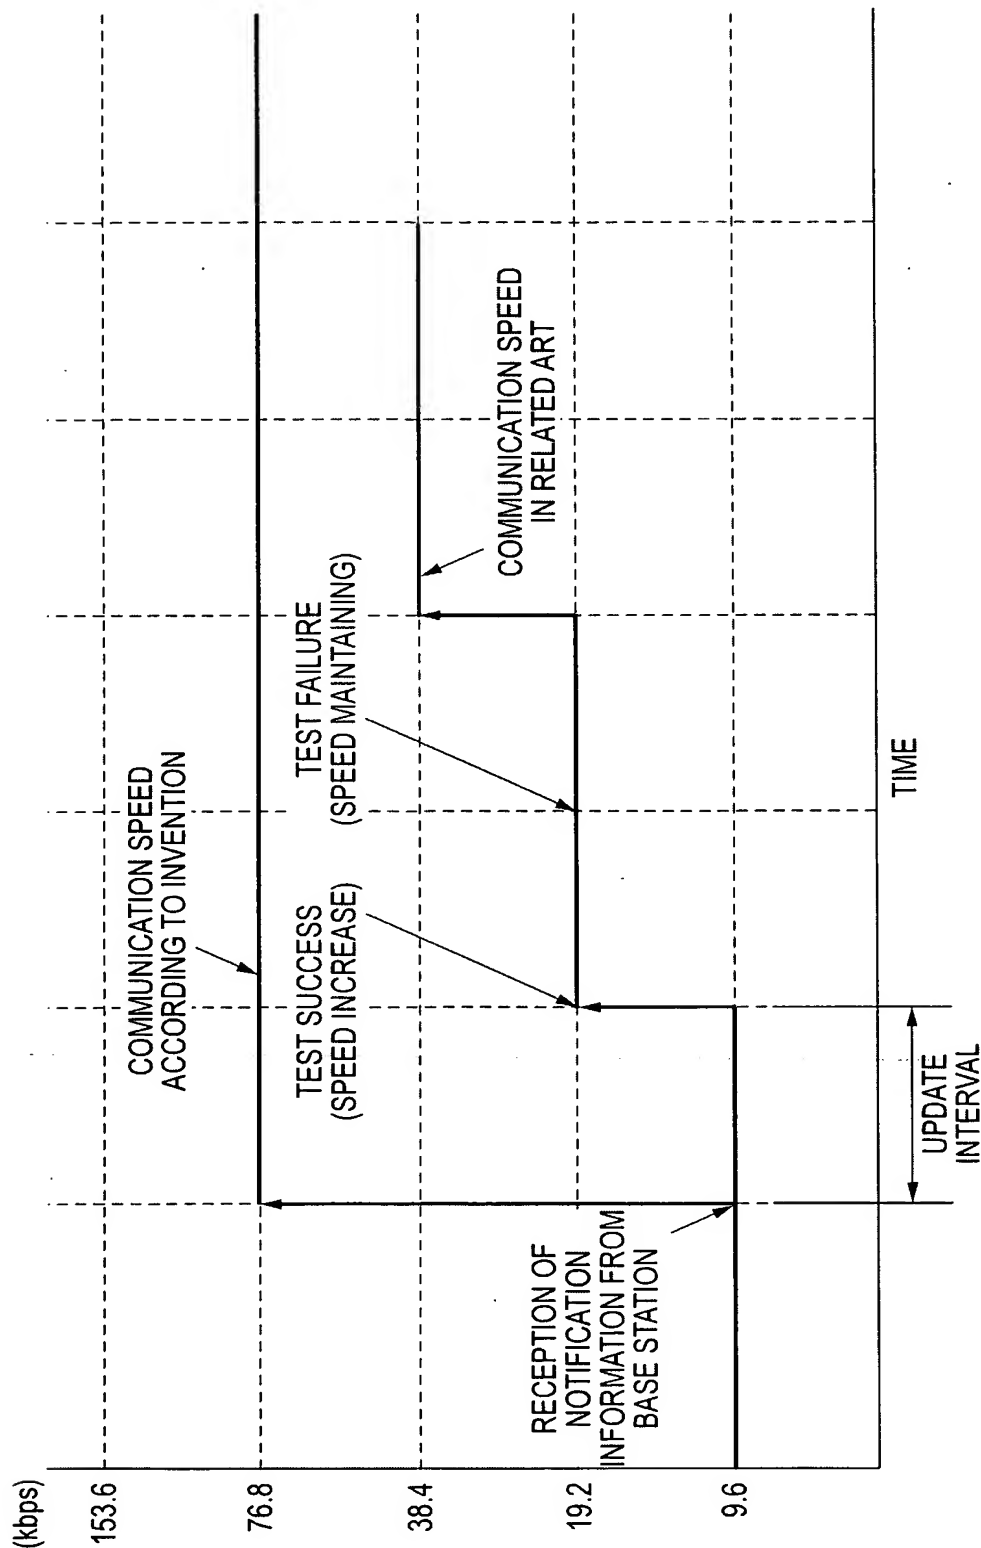

10/538262

10/10

FIG. 10

